


Construction

- 1 Flexible Pure Nickel Conductors
- 2 Double fibre glass lapped and braided
- 3 Fibreglass Braid

Also available in Mica Tape

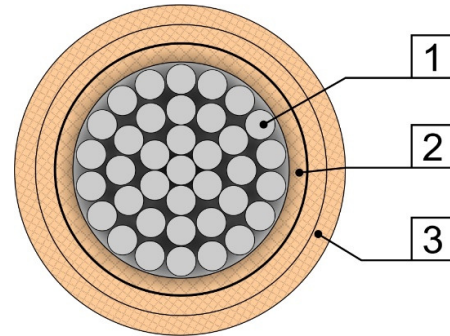

Norms: RoHS, Reach Compliant

Voltage: 240v RMS

Test Voltage: 2000v

Working Temperature: 400°C on the conductor

Minimum bending radius: 10 x Overall cable diameter

Application: For use in ovens, kilns, furnaces and other high temperatures environments where no mechanical protection is required.

Designed to work at temperatures up to 400°C

Part No.	Nominal Size mm ²	Conductor Stranding (mm)	Nominal Overall diameter (mm)
320050110	0.5	16/0.2	2.1
320070110	0.75	23/0.193	2.3
320100110	1.0	32/0.2	2.5
320150110	1.5	30/0.25	2.8
320250110	2.5	50/0.25	3.7
320400110	4.0	56/0.3	3.9
320600110	6.0	84/0.3	5.3

Other sizes available, please contact our sales department

Options: Stainless Steel Braid, multi conductor versions

All information contained herewith is believed to be reliable but cannot be guaranteed. The user shall determine the suitability of the product for its particular purpose.