


## Construction

- 1 Flexible Pure Nickel Conductors
- 2 Fibre glass insulation
- 3 Double fibre glass lapped and braided

Also available in  
Mica Tape / PTFE Tape / Polyimide Tape

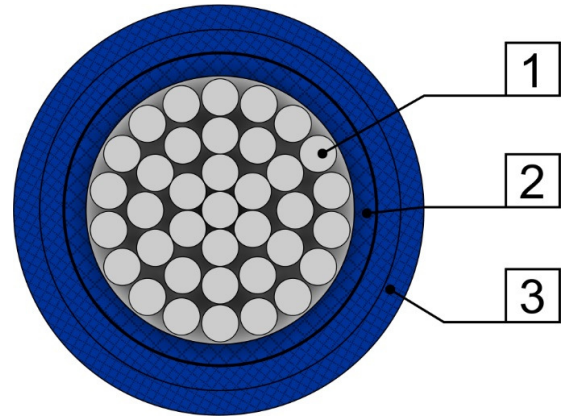

**Norms:** RoHS, Reach Complaint

**Voltage:** 240v RMS

**Test Voltage:** 2000v

**Working Temperature:** 400°C on the conductor

**Minimum bending radius:** 10 x Overall cable diameter

**Application:** For use in ovens, kilns, furnaces and other high temperatures environments with no mechanical protection is required.

Designed to work at temperatures up to 400°C

Nominal Size mm <sup>2</sup>	Conductor Stranding (mm)	Nominal Overall diameter (mm)
0.5	16/0.2	2.1
0.75	23/0.193	2.3
1.0	32/0.2	2.5
1.5	30/0.25	2.8
2.5	50/0.25	3.7
4.0	56/0.3	3.9
6.0	84/0.3	5.3

All information contained herewith is believed to be reliable but cannot be guaranteed. The user shall determine the suitability of the product for its particular purpose.